




Functions

- System type: 6 unit full range frequency airtight loudspeaker
- Speaker component: Full range driver 3" (75mm diameter 20mm voice coil) x 12
- Connector: Standard 4PIN phoenix connector
- Enclosure: 12mm(0.5")MDF
- Reference applications: Multifunctional hall, auditorium, lecture hall, conference room
- Nominal coverage pattern (-6dB) : 90°Hx20°V

Specifications

Information

Model	SHOWQ30
Rated power	480W
Max power	960W
Peak power	1920W
Nominal impedance	8 Ω
Recommended power amplifier output rating	500W-100W@8 Ω
Nominal sensitivity(1W@1m)	99dB
MaxSPL (Pmax@1m)	126dB@480W (129dB@960W)
Frequency response (-10dB)	90Hz-18.5KHz
Color	Default is black, other colors can be customized
weight	10.7KGS
Dimensions	W118mm x D125mm x H1091mm

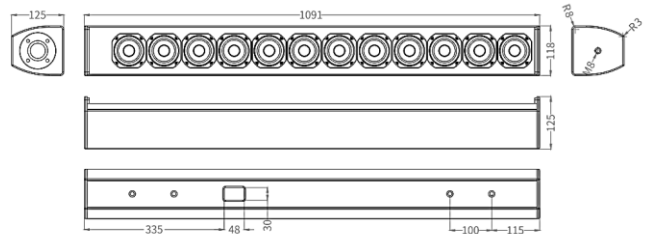

Agent: